

生産終了品(全定格)

参考用

F25P SERIES


250V 500V 700V AC, DC

- 定格電圧 250V AC/350V DC ●定格電流 30~600A
- しや断容量 250V/350V-100KA AC, DC (L/R 10mS)
- Voltage Rating 250V AC/350V DC ●Current Rating 30~600A
- Breaking Capacity 250V/350V-100KA AC, DC (L/R 10mS)



◆外形図 : Outline Dimensional Drawings (m/m)

fig 1

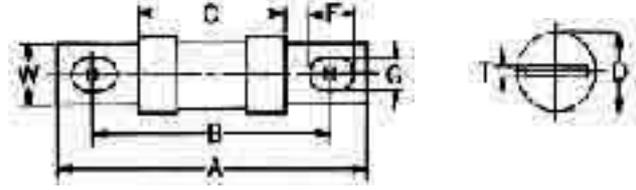


◆仕様/Specifications

Type	定格電流	溶断 I ² t	全しや断 I ² t	外形寸法 Dimensions (m/m)								重量	個数	Fig
	Amper Rating	Pre-arc I ² t (A ² S)	Total I ² t (A ² S) at 250V-100KA	A	B	C	D	T	F	G	W			
F25P-30	生産中止	50	350	82	62	42	20	2.5	11	8.5	18	60	10	1
F25P-40		90	650											
F25P-50		150	1,100											
F25P-60		220	1,600											
F25P-70	70A	300	2,000	80	62	27	23	3	15	8.5	18	75	10	1
F25P-75	75A	350	2,400											
F25P-80	生産中止	450	3,000											
F25P-100	100A	600	4,000											
F25P-125	生産中止	1,000	6,500	98	73	38	37	5	14	11	25	220	5	1
F25P-150	150A	1,700	9,500											
F25P-175	生産中止	2,300	13,000											
F25P-200	200A	3,000	18,000											
F25P-225	生産中止	3,600	22,000	102	72	38	45	6	14	11	30	300	5	1
F25P-250		4,700	28,000											
F25P-300		7,200	42,000											
F25P-350		11,000	55,000											
F25P-400	14,500	85,000												
F25P-450	17,000	100,000												

端子変更における寸法変更

◎溶断時間-電流特性曲線 (Time Current curve)

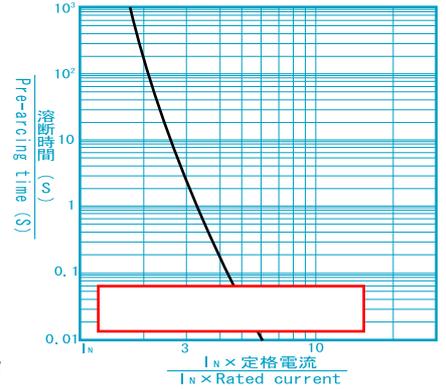

F50P SERIES


500V AC, DC

- 定格電圧 500V AC, DC ●定格電流 20~500A
- しや断容量 500V-100KA AC, DC (L/R 10mS)
- Voltage Rating 500V AC, DC ●Current Rating 20~500A
- Breaking Capacity 500V-100KA AC, DC (L/R 10mS)

◆仕様/Specifications

Type	定格電流	溶断 I ² t	全しや断 I ² t	外形寸法 Dimensions (m/m)								重量	個数	Fig
	Amper Rating	Pre-arc I ² t (A ² S)	Total I ² t (A ² S) at 500V-100KA	A	B	C	D	T	F	G	W			
F50P-20	生産中止	20	190	82	62	43	20	2.5	11	8.5	18	60	10	1
F50P-30		60	480											
F50P-35		85	680											
F50P-40		120	900											
F50P-45		150	1,200											
F50P-50		200	1,500											
F50P-60		250	1,800											
F50P-70		330	2,500											
F50P-80		500	3,600											
F50P-90		620	4,500											
F50P-100	750	5,300	96	72	44	24	3	11	8.5	18	85	10	1	
F50P-125	1,300	8,500												
F50P-150	2,100	12,800												
F50P-175	3,000	19,600												
F50P-200	4,600	26,500												
F50P-250	6,200	49,000												
F50P-300	11,000	76,000												
F50P-350	16,000	110,000												
F50P-400	21,000	140,000												

◎溶断時間-電流特性曲線 (Time Current curve)

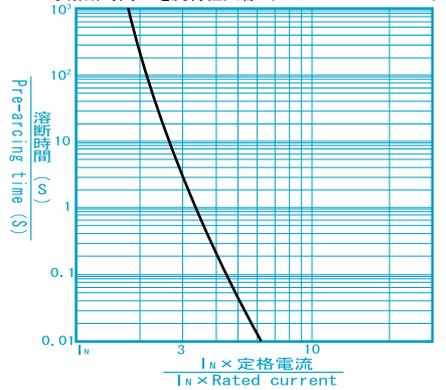

F70P SERIES

700V AC, DC

- 定格電圧 700V AC, DC ●定格電流 35~400A
- しや断容量 700V-100KA AC, DC (L/R 10mS)
- Voltage Rating 700V AC, DC ●Current Rating 35~400A
- Breaking Capacity 700V-100KA AC, DC (L/R 10mS)

◆仕様/Specifications

Type	定格電流	溶断 I ² t	全しや断 I ² t	外形寸法 Dimensions (m/m)								重量	個数	Fig
	Amper Rating	Pre-arc I ² t (A ² S)	Total I ² t (A ² S) at 700V-100KA	A	B	C	D	T	F	G	W			
F70P-35	生産中止	90	800	114	92	43	20	2.5	11	8.5	18	65	10	1
F70P-40		120	1,100											
F70P-50		190	1,750											
F70P-60		260	2,500											
F70P-70		420	3,600											
F70P-80		510	4,600											
F70P-90		650	6,000											
F70P-100		910	7,500											
F70P-125		1,700	15,300											
F70P-150		2,400	20,000											
F70P-175	3,500	30,000	125	102	45	37	5	14	11	25	290	5	1	
F70P-200	4,700	42,000												
F70P-250	7,600	69,000												
F70P-300	12,000	127,000												
F70P-350	16,500	180,000	129	102	45	45	6	14	11	30	410	5	1	

◎溶断時間-電流特性曲線 (Time Current curve)

